



Automotive Equipment

C362 EF-C322 EF

EN Electrohydraulic underbody double scissors type lift



3600 3200



C-Line *Lifting Equipment*

Tyre Changers | Wheel Balancers | Wheel Aligners | Lifts | Miscellany



Automotive Equipment

C362 EF - C322 EF


Electrohydraulic underbody double scissors type lift

Electrohydraulic underbody double scissors type lift, for tyre specialists, car workshops, and body repairers.

Alignment of the runways with a dual **MASTER/SLAVE** circuit (**two cylinders per runboard**) without mechanical safety racks. Runboards version with flaps (F).

All models available in both on-floor and flush installation versions.

- A** Unique arm geometry for maximum stiffness and minimised space usage
Special **lift linkage**, for lifting loads even from the lowest lift height.
- B** **Generously sized, self-lubricating** sliding blocks.
- C** **Runways with suspended flaps** which also act as vehicle access ramps.
- D** **Adjustment bolts** with rubber to cushion the end of the stroke.



TECHNICAL DATA

| | C362 EF | C322 EF |
|---------------------|--------------------------------|---------|
| Lift capacity | 3600 kg | 3200 kg |
| Lifting time | 45 s | |
| Three phase motor | 400/230V - 3kW - 3Ph - 50/60Hz | |
| Single phase motor | 230V - 3kW - 1Ph - 50/60Hz | |
| Max. lifting height | 1890 mm | |
| Lift min. height | 110 mm | 105 mm |

ACCESSOIRES

All models are equipped with:



- Self-lubricating bushings on all rotating parts.
- Set of 4 rubber pads.

STANDARD

- Pair of cross pieces and pads for off-road vehicles
- Kit for pit installations

OPTIONAL* For other optional accessories, refer to separate catalogue

DIMENSIONS TECO C322 EF - TECO C362 EF

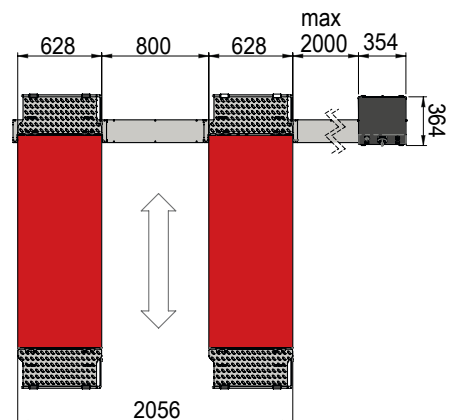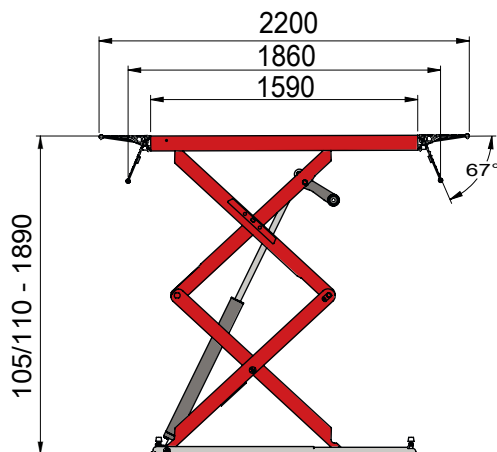

Photographs, features and technical data are not binding, they are subject to change without notice - Cod. DPTC000318B_Ed. 01_2023



NEXION SPA - ITALY
www.tecoautomotive.com - tec@teco.it

Designed in
ITALY

